




## VL 604Z (Hot rolled sheet piles)

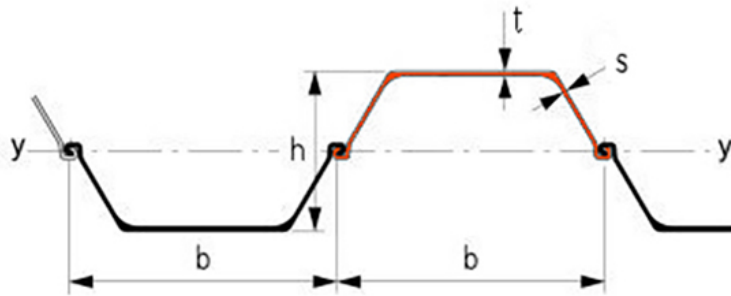

Section description	Product group	Shape	Section Modulus	Moment of Inertia	Width	Height	Thickness flange	Thickness web	Weight single	Weight	Coating 2 sides	Coating area
			in <sup>3</sup> /ft cm <sup>3</sup> /m	in <sup>4</sup> /ft cm <sup>4</sup> /m	inch mm	inch mm	inch mm	inch mm	lbs/ft kg/m	lbs/ft <sup>2</sup> kg/m <sup>2</sup>	ft <sup>2</sup> /ft m <sup>2</sup> /m	ft <sup>2</sup> /ft m <sup>2</sup> /m
VL 604Z	Hot rolled sheet piles	U	32.5	249.6	23.62	15.35	0.425	0.394	53.4	27.14	5.96	1.52
			1,748	34,088	600	390	10.8	10.0	79.50	40.38	1.82	1.52

Production according EN10248 1&2 in steel grades up to 62ksi/430mpa  
 available from inventory and production  
 Origin: Czech Republic